

# PNC



## COMPACT CONNECTOR



**16 A**

- ▶ Glassfiber reinforced thermoplastic UL94 V-0
- ▶ Standard IP66/IP67 (IP68 on specification)
- ▶ Long life, 2 000 operations tested
- ▶ Very good vibration resistance

### ELECTRICAL FEATURES

Permitted current range	4-20 mA/16 A
Maximum voltage	480 V
Impulse withstand voltage	5 kV/Pollution degree 3
Contact resistance	< 2 mΩ
Polarity	3P+N+E
Conductors accepted	From 0,75 mm <sup>2</sup> to 2,5 mm <sup>2</sup> Screwed terminals
Cable diameter	From 11 to 15 mm (smaller Ø available according to specification)

### MECHANICAL FEATURES

Casing & insulator	Glassfiber reinforced thermoplastic UL94 V-0
Butt contacts	Copper alloy with silver-nickel tips
Contact protection	Tinning
Load cycles	> 2 000 cycles
Shock resistance	IK08
Vibration	Frequency 5-1000 Hz, 1g (90 minutes on each critical frequency) according to IEC 6068-2-6

### CLIMATIC FEATURES

Ambient temperature	-40 °C to +100 °C
IP protection Socket with cap	IP66/IP67 IP69 100bar (1450 PSI) 80 °C
IP protection plug connected	IP66/IP67 IP68 tested at 10 meters deep for 15 days (please contact us for references) IP69 100bar (1450 PSI) 80 °C
Salt, Fog performance	200 h not connected > 1 000 h connected
Resistance to fluids	Motor oils, petrol, oils, detergents...

#### SOCKET-

**OUTLET** female  
(with M25 lock nut)  
**PNC (16 A)**



**INLET** male  
(with M25 lock nut)  
**PNC (16 A)**



480 V AC	5P	01E4007	01E8007
----------	----	---------	---------

#### COUPLER


socket female  
**PNC (16 A)**




**PLUG** male  
**PNC (16 A)**



480 V AC	5P	01E3007	01E1007
----------	----	---------	---------

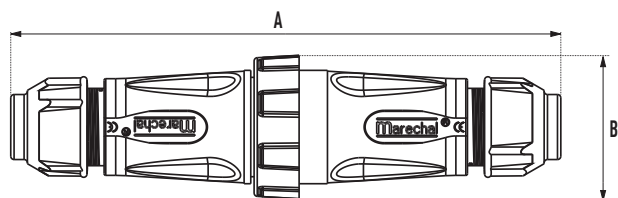

<b>PNC</b>	<b>A</b>	<b>B</b>
	165	45

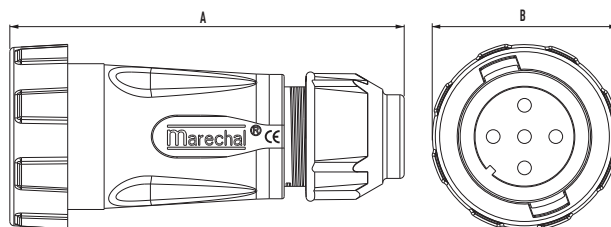

<b>PNC</b>	<b>A</b>	<b>B</b>
	92	45

#### PNC connectors comply with:

- The requirements of IEC 61984, IEC 60529, IEC 62262, IEC 68-2-6 International standards,
- The European Low Voltage Directive 2014/35/EU,
- The French NF C 15-100 standard,
- The decrees relating to workers' protection in Belgium, Spain and Italy.

Also certified by TR CU (GOST) (Russian inspection laboratory).

