

# ATX™ D Series Actuators, Pilot Lights, Contact Blocks, Switches and Accessories

## Flameproof

ATEX/IECEX:  
Zone 1 and 2 – 21 and 22  
⊕ II 2 GD  
IP66 – IK10

### Applications

- Suitable for use with certified flameproof Ex d enclosures for control equipment.

### Features

- DIN rail mounted (TS35) and panel mounted versions.
- Large range of M22 x 1.5 mm (0.059") screwed actuator operators including, push buttons, rotary actuators, pilot lights, ammeters and selector switches.
- Fully supplied with actuator, shaft, contact block and yellow laminated plastic legend plate with black lettering 60 x 50 mm (2.36" x 1.97").

### Standard Materials

- Box: gray painted marine grade aluminum alloy
- CF2B box: gray painted cast iron for CF2B


### ATEX/IECEX Certifications and Compliances

- Certification Type TCD
  - Gas, Zones 1 and 2
    - Conforming to ATEX 94/9/CE: ⊕ II 2 G
    - ATEX/IEC Protection: Ex d IIC
  - Dust, Zones 21 and 22
    - Conforming to ATEX 94/9/CE: ⊕ II 2 D
    - ATEX/IEC Protection: Ex tD A21
  - Surface Temperature: -40 °C to +60 °C (-40 °F to +140 °F)
  - CE Declaration of Conformity: 5C213
  - ATEX Certificate: LCIE 02 ATEX 0036 U
  - IECEx Certificate: IECEx LCI 10.0022U
- Index of Protection according EN/IEC 60529: IP66
- Impact Resistance (shock): IK10


### EURASEC Certification

- EURASEC RU C-FR. Г505.B.00909

Rail Mounted Version

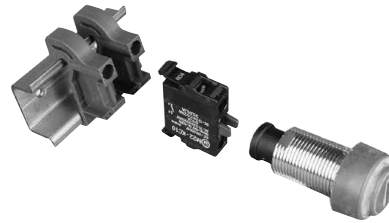

Panel Mounted Version

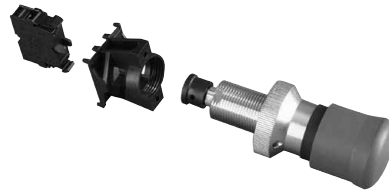








# ATX™ D Series TS35 Rail Mounted Actuators and Contact Blocks

Flameproof

ATEX/IECEX:  
Zone 1 and 2 – 21 and 22  
Ex II 2 GD  
IP66 – IK10

Appleton®

CONTROLS: ATEX/IECEX FLAMEPROOF CONTROL STATIONS AND RELAYS

Description/Function		Weight kg (lb)	Volume dm <sup>3</sup> (in <sup>3</sup> )	Catalog Number ①	
	<b>Spring Return Push Button</b>				
	Green spring return 'I' push button with 1NO momentary contact	0.2 (0.44)	0.4 (24.4)	<b>DA5GR</b>	
	Red spring return '0' push button with 1NC momentary contact	0.2 (0.44)	0.4 (24.4)	<b>DA9RR</b>	
	<b>Mushroom Head Push Button</b>				
	Red mushroom head spring return with 1NC momentary contact Padlockable in both positions	0.2 (0.44)	0.4 (24.4)	<b>DR9R</b>	
	Red mushroom head push pull with 1NC maintained contact Padlockable in both positions	0.2 (0.44)	0.4 (24.4)	<b>DD9R</b>	
	Red mushroom head key release with 1NC maintained contact Unlocked with key (MS1)	0.2 (0.44)	0.4 (24.4)	<b>DC9R</b>	
	<b>Rotary Actuator</b>				
	2 maintained positions with 1NO maintained contact	0.2 (0.44)	0.4 (24.4)	<b>DH5R</b>	
	2 maintained positions key operated with 1NO maintained contact key removable in both positions (MS1)	0.2 (0.44)	0.4 (24.4)	<b>DG5R</b>	
	<b>Additional Contacts</b>				
	1 x NO contact	0.1 (0.22)	0.2 (12.20)	<b>DCB5R</b>	
	1 x NC contact	0.1 (0.22)	0.2 (12.20)	<b>DCB9R</b>	
	<b>LED Pilot Lights</b>				
	Red 12 to 30 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPR12R</b>	
	Green 12 to 30 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPG12R</b>	
	White 12 to 30 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPW12R</b>	
	Blue 12 to 30 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPB12R</b>	
	Yellow 12 to 30 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPY12R</b>	
	Red 48 to 60 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPR48R</b>	
	Green 48 to 60 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPG48R</b>	
	White 48 to 60 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPW48R</b>	
	Blue 48 to 60 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPB48R</b>	
	Yellow 48 to 60 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPY48R</b>	
	Red 85 to 264 Vac	0.1 (0.22)	0.4 (24.4)	<b>DPR85R</b>	
	Green 85 to 264 Vac	0.1 (0.22)	0.4 (24.4)	<b>DPG85R</b>	
	White 85 to 264 Vac	0.1 (0.22)	0.4 (24.4)	<b>DPW85R</b>	
	Blue 85 to 264 Vac	0.1 (0.22)	0.4 (24.4)	<b>DPB85R</b>	
	Yellow 85 to 264 Vac	0.1 (0.22)	0.4 (24.4)	<b>DPY85R</b>	
		<b>Transfer Kit</b>			
	To be used when replacing old catalog number range of contacts 094057 and 094058 and old catalog number range of indicators 093990-093991 and 094090-094091	0.2 (0.44)	0.4 (24.4)	<b>093958</b>	
	<b>16 A Switches</b>				
	1-pole switch with non-padlockable handle "0-1"	0.3 (0.66)	0.5 (30.51)	<b>DS116R</b>	
	2-pole switch with non-padlockable handle "0-1"	0.3 (0.66)	0.5 (30.51)	<b>DS216R</b>	
	3-pole switch with non-padlockable handle "0-1"	0.3 (0.66)	0.5 (30.51)	<b>DS316R</b>	
	4-pole switch with non-padlockable handle "0-1"	0.3 (0.66)	0.5 (30.51)	<b>DS416R</b>	
	2 way 1-pole selector switch with non-padlockable handle "1-2"	0.3 (0.66)	0.5 (30.51)	<b>DS21601R</b>	
	3 way 1-pole selector switch with non-padlockable handle "1-0-2"	0.3 (0.66)	0.5 (30.51)	<b>DS21602R</b>	

① Legend plate supplied.








# ATX™ D Series Panel Mounted Actuators and Contact Blocks

## Flameproof

ATEX/IECEX:  
Zone 1 and 2 – 21 and 22  
II 2 GD  
IP66 – IK10

Appleton

CONTROLS: ATEX/IECEX FLAMEPROOF CONTROL STATIONS AND RELAYS





Description/Function		Weight kg (lb)	Volume dm <sup>3</sup> (in <sup>3</sup> )	Catalog Number ①
	<b>Spring Return Push Button</b>			
	Green spring return 'I' push button with 1NO momentary contact	0.2 (0.44)	0.4 (24.4)	<b>DA5GP</b>
	Red spring return 'O' push button with 1NC momentary contact	0.2 (0.44)	0.4 (24.4)	<b>DA9RP</b>
	<b>Mushroom Head Push Button</b>			
	Red mushroom head spring return with 1NC momentary contact Padlockable in both positions	0.2 (0.44)	0.4 (24.4)	<b>DR9P</b>
	Red mushroom head push pull with 1NC maintained contact Padlockable in both positions	0.2 (0.44)	0.4 (24.4)	<b>DD9P</b>
	Red mushroom head key release with 1NC maintained contact Unlocked with key (MS1)	0.2 (0.44)	0.4 (24.4)	<b>DC9P</b>
	<b>Rotary Actuator</b>			
	2 maintained positions with 1NO maintained contact	0.2 (0.44)	0.4 (24.4)	<b>DH5P</b>
	2 maintained positions key operated with 1NO maintained contact key removable in both positions (MS1)	0.2 (0.44)	0.4 (24.4)	<b>DG5P</b>
	<b>Additional Contacts</b>			
	1 x NO contact	0.1 (0.22)	0.2 (12.20)	<b>DCB5P</b>
	1 x NC contact	0.1 (0.22)	0.2 (12.20)	<b>DCB9P</b>
	<b>LED Pilot Lights</b>			
	Red 12 to 30 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPR12P</b>
	Green 12 to 30 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPG12P</b>
	White 12 to 30 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPW12P</b>
	Blue 12 to 30 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPB12P</b>
	Yellow 12 to 30 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPY12P</b>
	Red 48 to 60 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPR48P</b>
	Green 48 to 60 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPG48P</b>
	White 48 to 60 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPW48P</b>
	Blue 48 to 60 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPB48P</b>
	Yellow 48 to 60 Vac/Vdc	0.1 (0.22)	0.4 (24.4)	<b>DPY48P</b>
	Red 85 to 264 Vac	0.1 (0.22)	0.4 (24.4)	<b>DPR85P</b>
	Green 85 to 264 Vac	0.1 (0.22)	0.4 (24.4)	<b>DPG85P</b>
	White 85 to 264 Vac	0.1 (0.22)	0.4 (24.4)	<b>DPW85P</b>
	Blue 85 to 264 Vac	0.1 (0.22)	0.4 (24.4)	<b>DPB85P</b>
	Yellow 85 to 264 Vac	0.1 (0.22)	0.4 (24.4)	<b>DPY85P</b>
	<b>Transfer Kit</b>			
	To be used when replacing old catalog number range of contacts 094055 and 094056 and old catalog number range of indicators 093992-093993 and 094092-094093	0.2 (0.44)	0.4 (24.4)	<b>093959</b>
	<b>16 A Switches</b>			
	1-pole switch with non-padlockable handle "0-1"	0.3 (0.66)	0.5 (30.51)	<b>DS116P</b>
	2-pole switch with non-padlockable handle "0-1"	0.3 (0.66)	0.5 (30.51)	<b>DS216P</b>
	3-pole switch with non-padlockable handle "0-1"	0.3 (0.66)	0.5 (30.51)	<b>DS316P</b>
	4-pole switch with non-padlockable handle "0-1"	0.3 (0.66)	0.5 (30.51)	<b>DS416P</b>
	2 way 1-pole selector switch with non-padlockable handle "1-2"	0.3 (0.66)	0.5 (30.51)	<b>DS21601P</b>
	3 way 1-pole selector switch with non-padlockable handle "1-0-2"	0.3 (0.66)	0.5 (30.51)	<b>DS21602P</b>
	2 way 2-pole selector switch with non-padlockable handle "1-2"	0.3 (0.66)	0.5 (30.51)	<b>DS41601P</b>
3 way 2-pole selector switch with non-padlockable handle "1-0-2"	0.3 (0.66)	0.5 (30.51)	<b>DS41602P</b>	

① Legend plate supplied.

# ATX™ D Series Accessories

## Flameproof

ATEX/IECEX:  
 Zone 1 and 2 – 21 and 22  
 II 2 GD  
 IP66 – IK10

	Description/Function	Weight kg (lb)	Volume dm <sup>3</sup> (in <sup>3</sup> )	Catalog Number
	<b>Spare Shrouds for Spring Return Push Buttons</b>			
	Green shroud marked "I"	0.1 (0.22)	0.2 (12.20)	<b>DSG</b>
	Red shroud marked "0"	0.1 (0.22)	0.2 (12.20)	<b>DSR</b>
	Green shroud marked "start"	0.1 (0.22)	0.2 (12.20)	<b>DSS</b>
	Red shroud marked "A Réarmement"	0.1 (0.22)	0.2 (12.20)	<b>DSA</b>
	Black shroud (unmarked)	0.1 (0.22)	0.2 (12.20)	<b>DSN</b>
	Blue shroud (unmarked)	0.1 (0.22)	0.2 (12.20)	<b>DSB</b>
	<b>Aluminum Guard Painted Red</b>			
	Mushroom head actuator protection			<b>DGD1A</b>
	<b>Stainless Steel Padlocking Devices</b>			
	For spring return push button			<b>DPLD1S</b>
	For rotary actuator, red mushroom head spring return or push-pull			<b>DPLD2S</b>
	<b>Spare Lenses for Pilot Lights</b>			
	Red	0.1 (0.22)	0.2 (12.20)	<b>DPRENS</b>
	Green	0.1 (0.22)	0.2 (12.20)	<b>DPGLENS</b>
	White	0.1 (0.22)	0.2 (12.20)	<b>DPWLENS</b>
	Blue	0.1 (0.22)	0.2 (12.20)	<b>DPBLENS</b>
	Yellow	0.1 (0.22)	0.2 (12.20)	<b>DPYLENS</b>
	<b>Spare Handle for Switches</b>			
	Non-padlockable handle	0.2 (0.44)	0.2 (12.20)	<b>DSNPH</b>
	Padlockable handle — 48 mm x 48 mm (1.89" x 1.89")	0.06 (0.13)	0.3 (18.31)	<b>DSPH</b>
	<b>Laminated Plastic Legend Plate with Black Lettering</b>			
	Large size — 60 mm x 50 mm (2.36 in x 1.97")			<b>DLP00</b>
	Small size — 45 mm x 31.2 mm (1.77" x 1.24")			<b>DLP01</b>
	<b>Blanking Plug</b>			
	Used to close up unused openings on cover M22 x 1.5 mm (0.059")	0.2 (0.44)	0.2 (12.20)	<b>DBPM22</b>

# ATX™ D Series AC Ammeter

Flameproof

ATEX/IECEX:  
Zone 1 and 2 – 21 and 22  
II 2 GD  
IP66 – IK10

Appleton

CONTROLS: ATEX/IECEX FLAMEPROOF CONTROL STATIONS AND RELAYS

48 mm x 48 mm (1.89" x 1.89") – Connection on Current Transformer – Deflection 90° – Class 1.5 – Round Barrel



Description/Function	Weight kg (lb)	Volume dm <sup>3</sup> (in <sup>3</sup> )	Catalog Number
<b>Rail Mounted</b>			
1A C.T. 3 x F.L.C. with 0-1-3 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA1348R</b>
1A C.T. 5 x F.L.C. with 0-1-5 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA1548R</b>
1A C.T. 6 x F.L.C. with 0-1-6 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA1648R</b>
5A C.T. 3 x F.L.C. with 0-1-3 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA5348R</b>
5A C.T. 5 x F.L.C. with 0-1-5 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA5548R</b>
5A C.T. 6 x F.L.C. with 0-1-6 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA5648R</b>
<b>Panel Mounted</b>			
1A C.T. 3 x F.L.C. with 0-1-3 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA1348P</b>
1A C.T. 5 x F.L.C. with 0-1-5 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA1548P</b>
1A C.T. 6 x F.L.C. with 0-1-6 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA1648P</b>
5A C.T. 3 x F.L.C. with 0-1-3 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA5348P</b>
5A C.T. 5 x F.L.C. with 0-1-5 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA5548P</b>
5A C.T. 6 x F.L.C. with 0-1-6 Scale	0.1 (0.22)	0.4 (24.4)	<b>DMA5648P</b>
<b>AC Ammeter Accessory</b>			
Red Adjustable Index			<b>DM48A</b>

## Interchangeable Dials for Above Ammeter

Scale	Number	Catalog Number	Scale	Number	Catalog Number	Scale	Number	Catalog Number
<b>For 1 A Current Transformer 3 x F.L.C.</b>			<b>For 1 A Current Transformer 6 x F.L.C.</b>			<b>For 5 A Current Transformer 5 x F.L.C.</b>		
0 - 5 - 15	A	<b>DA135</b>	0 - 5 - 30	A	<b>DA165</b>	0 - 5 - 25	A	<b>DA555</b>
0 - 10 - 30	A	<b>DA1310</b>	0 - 10 - 60	A	<b>DA1610</b>	0 - 10 - 50	A	<b>DA5510</b>
0 - 15 - 45	A	<b>DA1315</b>	0 - 15 - 90	A	<b>DA1615</b>	0 - 15 - 75	A	<b>DA5515</b>
0 - 20 - 60	A	<b>DA1320</b>	0 - 20 - 120	A	<b>DA1620</b>	0 - 20 - 100	A	<b>DA5520</b>
0 - 30 - 90	A	<b>DA1330</b>	0 - 30 - 180	A	<b>DA1630</b>	0 - 30 - 150	A	<b>DA5530</b>
0 - 40 - 120	A	<b>DA1340</b>	0 - 40 - 240	A	<b>DA1640</b>	0 - 40 - 200	A	<b>DA5540</b>
0 - 50 - 150	A	<b>DA1350</b>	0 - 50 - 300	A	<b>DA1650</b>	0 - 50 - 250	A	<b>DA5550</b>
0 - 60 - 180	A	<b>DA1360</b>	0 - 60 - 360	A	<b>DA1660</b>	0 - 60 - 300	A	<b>DA5560</b>
0 - 75 - 225	A	<b>DA1375</b>	0 - 75 - 450	A	<b>DA1675</b>	0 - 75 - 375	A	<b>DA5575</b>
0 - 100 - 300	A	<b>DA13100</b>	0 - 100 - 600	A	<b>DA16100</b>	0 - 100 - 500	A	<b>DA55100</b>
0 - 125 - 375	A	<b>DA13125</b>	0 - 125 - 750	A	<b>DA16125</b>	0 - 125 - 625	A	<b>DA55125</b>
0 - 150 - 450	A	<b>DA13150</b>	0 - 150 - 900	A	<b>DA16150</b>	0 - 150 - 750	A	<b>DA55150</b>
0 - 200 - 600	A	<b>DA13200</b>	0 - 200 - 1200	A	<b>DA16200</b>	0 - 200 - 1000	A	<b>DA55200</b>
0 - 250 - 750	A	<b>DA13250</b>	0 - 250 - 1500	A	<b>DA16250</b>	0 - 250 - 1250	A	<b>DA55250</b>
<b>For 1 A Current Transformer 5 x F.L.C.</b>			<b>For 5 A Current Transformer 3 x F.L.C.</b>			<b>For 5 A Current Transformer 6 x F.L.C.</b>		
0 - 5 - 25	A	<b>DA155</b>	0 - 5 - 15	A	<b>DA535</b>	0 - 5 - 30	A	<b>DA565</b>
0 - 10 - 50	A	<b>DA1510</b>	0 - 10 - 30	A	<b>DA5310</b>	0 - 10 - 60	A	<b>DA5610</b>
0 - 15 - 75	A	<b>DA1515</b>	0 - 15 - 45	A	<b>DA5315</b>	0 - 15 - 90	A	<b>DA5615</b>
0 - 20 - 100	A	<b>DA1520</b>	0 - 20 - 60	A	<b>DA5320</b>	0 - 20 - 120	A	<b>DA5620</b>
0 - 30 - 150	A	<b>DA1530</b>	0 - 30 - 90	A	<b>DA5330</b>	0 - 30 - 180	A	<b>DA5630</b>
0 - 40 - 200	A	<b>DA1540</b>	0 - 40 - 120	A	<b>DA5340</b>	0 - 40 - 240	A	<b>DA5640</b>
0 - 50 - 250	A	<b>DA1550</b>	0 - 50 - 150	A	<b>DA5350</b>	0 - 50 - 300	A	<b>DA5650</b>
0 - 60 - 300	A	<b>DA1560</b>	0 - 60 - 180	A	<b>DA5360</b>	0 - 60 - 360	A	<b>DA5660</b>
0 - 75 - 375	A	<b>DA1575</b>	0 - 75 - 225	A	<b>DA5375</b>	0 - 75 - 450	A	<b>DA5675</b>
0 - 100 - 500	A	<b>DA15100</b>	0 - 100 - 300	A	<b>DA53100</b>	0 - 100 - 600	A	<b>DA56100</b>
0 - 125 - 625	A	<b>DA15125</b>	0 - 125 - 375	A	<b>DA53125</b>	0 - 125 - 750	A	<b>DA56125</b>
0 - 150 - 750	A	<b>DA15150</b>	0 - 150 - 450	A	<b>DA53150</b>	0 - 150 - 900	A	<b>DA56150</b>
0 - 200 - 1000	A	<b>DA15200</b>	0 - 200 - 600	A	<b>DA53200</b>	0 - 200 - 1200	A	<b>DA56200</b>
0 - 250 - 1250	A	<b>DA15250</b>	0 - 250 - 750	A	<b>DA53250</b>	0 - 250 - 1500	A	<b>DA56250</b>

# ATX™ D Series Actuators, Pilot Lights, Contact Blocks, Switches and Accessories Flameproof

ATEX/IECEX:  
Zone 1 and 2 – 21 and 22  
II 2 GD  
IP66 – IK10

## Technical Data

### Contact Block



#### NO Contact Block

#### NC Contact Block

Insulation Voltage (Ui)	500 V
Switching Capacity	
AC 15	4 A/115 V, 4 A/230 V, 2 A/500 V
DC 13	3 A/24 V, 1.7 A/42 V, 1.2 A/60 V, 0.3 A/220 V
Terminal connections	0.75 mm <sup>2</sup> to 2.5 mm <sup>2</sup> (0.0012 in <sup>2</sup> to 0.004 in <sup>2</sup> )
Operation life	>5,000,000 Operations

### LED Pilot Light



Rated Voltage	85-264 Vac, 50/60 Hz
Rating	5-15mA
Max. Power	0.33 W
Operation life	Average 100,000 Hours at +25 °C (+77 °F)

### 16 A Selector Switch

Rated insulation voltage	690 V	
Thermal rating	20 A	
AC 21	16 A	
AC 15	6 A	
AC 23	3 x 230 V	4 KW
	3 x 400 V	7.5 KW
	3 x 500 V	5.5 KW
AC 3	3 x 690 V	4 KW
	3 x 230 V	3 KW
	3 x 400 V	4 KW
	3 x 500 V	5.5 KW
	3 x 690 V	3 KW
Flexible Terminal connections	2.5 mm <sup>2</sup> (0.004 in <sup>2</sup> )	
Solid Terminal connections	4 mm <sup>2</sup> (0.006 in <sup>2</sup> )	

## 16 A Selector Switch Positions — X = Contact Closed

### DS116

Positions	Contacts
	1-2
0	
1	X

### DS216

Positions	Contacts	
	1-2	3-4
0		
1	X	X

### DS316

Positions	Contacts		
	1-2	3-4	5-6
0			
1	X	X	X

### DS416

Positions	Contacts			
	1-2	3-4	5-6	7-8
0				
1	X	X	X	X

### DS21601

Positions	Contacts	
	1-2	3-4
1	X	
2		X

### DS21602

Positions	Contacts	
	1-2	3-4
1	X	
0		
2		X

### DS41601

Positions	Contacts			
	1-2	3-4	5-6	7-8
1	X		X	
2		X		X

### DS41602

Positions	Contacts			
	1-2	3-4	5-6	7-8
1	X		X	
0				
2		X		X

# ATX™ D Series Actuators, Pilot Lights, Contact Blocks, Switches and Accessories

## Flameproof



ATEX/IECEX:  
 Zone 1 and 2 - 21 and 22  
 II 2 GD  
 IP66 - IK10

Appleton


CONTROLS: ATEX/IECEX FLAMEPROOF CONTROL STATIONS AND RELAYS

### Dimensions in Millimeters (Inches)


#### Rail Mounted

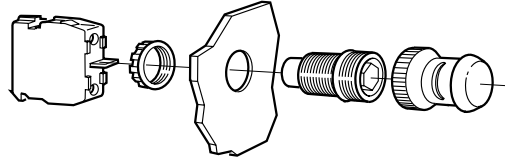

Rail Mounted Push Button





Rail Mounted Pilot Light

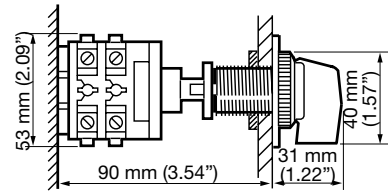


Back Mounted Switch


#### Panel Mounted

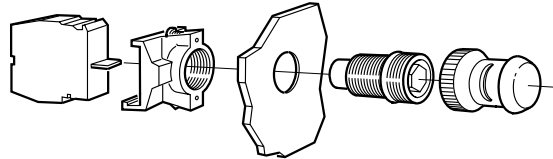

Panel Mounted Push Button




Panel Mounted Pilot Light

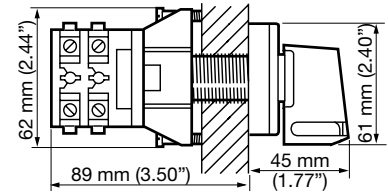


Panel Mounted Switch

#### Accessories



Blanking Plug



Ammeter